



ENQUIRY FORM

QUOTATION REQUEST

ORDER

CUSTOMER

DELIVERY ADDRESS

CONTRACTOR

Reference

Date

PLANT LOCATION

STOPS nr

HEADROOM mm

PIT mm

SERVICES nr

TRAVEL mm

LOAD kg

MANGUSTA

MINIWATT

ZEN

SHAFT

ENVIRONMENT

* with structure provided by customer, indicate inside structure dimensions with A.R.E.'s structure pag. 2

CABIN

Materials & colour

Materials & colour

Walls

Ceiling

Finishings

Folding doors

Floor

Car doors

In case of access control, fill-out pag. 3

WALL ACCESSORIES

Side A

Side B

Side C

Side D

1/2 Mirror


1/2 Panoramic

Mirror

Panoramic

Handrail

Internal Cladding

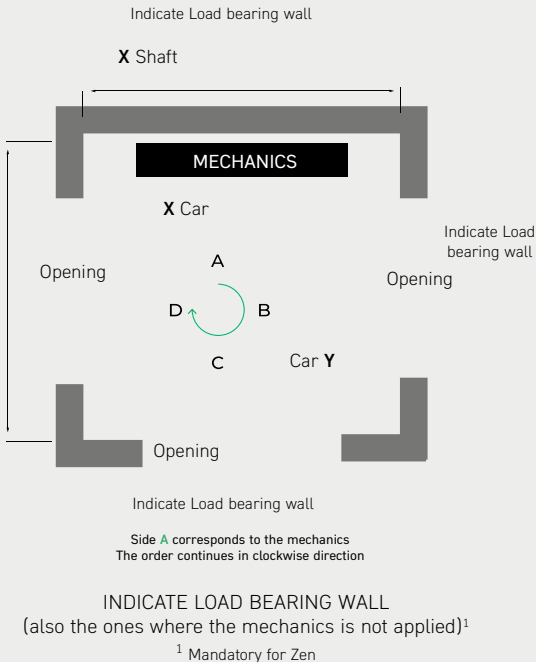

OTHER CAR ACCESSORIES *

* TFT display non available for Miniwatt

LANDING DOORS	FLOOR	SIDE	FINISHING	WINDOW	GLASS	LANDING ACCESSORIES	OUTDOOR	INDOOR

RAL painted mechanics

RAL painted car external walls

GENERAL NOTES

CABINET

Landing door side¹

Distant from shaft mt

Cables entry from shaft

at floor

Position on side

on the wall H 2100

on the wall H 800

¹Not possible with doors: Glass & Metal, Total Glass, 3AT, Non-standard doors height and EI
Not possible if the structure is provided by the custom

ARE STRUCTURE

ENVIRONMENT

¹With ARE Structure indicate external dimensions

FINISHING

RAL

ROOF Supply

ROOF TYPE

ROOF FOR OUTDOOR

Lower Side	Over hangs
Side A	Side A
Side B	Side B
Side C	Side C
Side D	Side D

Water Collecting Glass

Corner AB
 Corner BC
 Corner CD
 Corner DA

CLADDING

Side A

Side B

Side C

Side D

MIXED CLADDING

Side A

Cladding from the Top

Quote

From the top

Cladding from the Bottom

From the bottom

Side B

Cladding from the Top

Quote

From the top

Cladding from the Bottom

From the bottom

Side C

Cladding from the Top

Quote

From the top

Cladding from the Bottom

From the bottom

Side D

Cladding from the Top

Quote

From the top

Cladding from the Bottom

From the bottom

ACCESSORIES

Top Ventilation

Side A
 Side B
 Side C
 Side D

Bottom Ventilation

Side A
 Side B
 Side C
 Side D

Closing angles
 Roof casing
 Eaves pipe
 Pit cladding

Canopy 800mm

Quantity
 Side
 Floor

STRUCTURE BRACKETS

Upright AB

Upright BC

Upright CD

Upright DA

Structure brackets NOTES

HEADROOM BRACKETS

Upright AB

Upright BC

Upright CD

Upright DA

Headroom brackets NOTES

BOARDWALK

Quantity

Floor

Length

Depth

RAILINGS


Quantity

Floor

Length

Depth

General NOTES

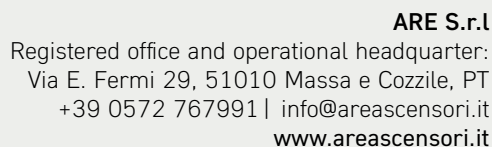[illegible]

- 2 positions Key – 1 extraction (2P1E)
- 2 positions Key – 2 extractions (2P2E)
- I-button monostable
- I-button bistable
- I-button EVO monostable
- Alphanumeric keypad N°1 exit

This key enables/disables the call buttons. Pulling out the key, the call button is disabled.

This type of key is used only to enable special functions (e.g. plant disabling). It is possible to extract the key both with open contact (function disabled) and with closed contact (function enabled).

Vandal-proof electronic key: the contact is interrupted for 5 seconds after placing the key on the reader (when the contact is interrupted, the green LED lights up).

Electronic equivalent of the 2P2E mechanical key. The contact is interrupted (green LED on) by placing the key on the reader once and is re-enabled (green LED off) by placing the key back on the reader.

Vandal-proof electronic key with one or more serial expansion boards with 4 contacts.

1 Select one of the keys listed in the KEY TYPE selection.

2 Indicate the contact function. Here below some compilation examples:

In car – key 1: 2P1E – Enables button “1”
key 2: 2P2E – Enables button “2” + “3”

At landing floor – OA – I-button monostable – Enables button at floor “OA”

3 It indicates the call button that must remain free for regulatory reasons.

4 Indicate the landing and the side.