

## ENQUIRY FORM

QUOTATION REQUEST

ORDER

CUSTOMER

Reference

Date

DELIVERY ADDRESS

CONTRACTOR

PLANT LOCATION

<b>STOPS</b> nr	<b>HEADROOM</b> mm	<b>PIT</b> mm
<b>SERVICES</b> nr	<b>TRAVEL</b> mm	<b>LOAD</b> kg

MANGUSTA

SHAFT

\* with structure provided by customer, indicate inside structure dimensions with A.R.E.'s structure pag. 2


MINIWATT

ENVIRONMENT

CABIN	Materials & colour	Materials & colour
Walls		Ceiling
Finishings		Folding doors
Floor		Car doors

In case of access control, fill-out pag. 3

WALL ACCESSORIES	Side A	Side B	Side C	Side D
1/2 Mirror				
1/2 Panoramic				
Mirror				
Panoramic				
Handrail				
Internal Cladding				

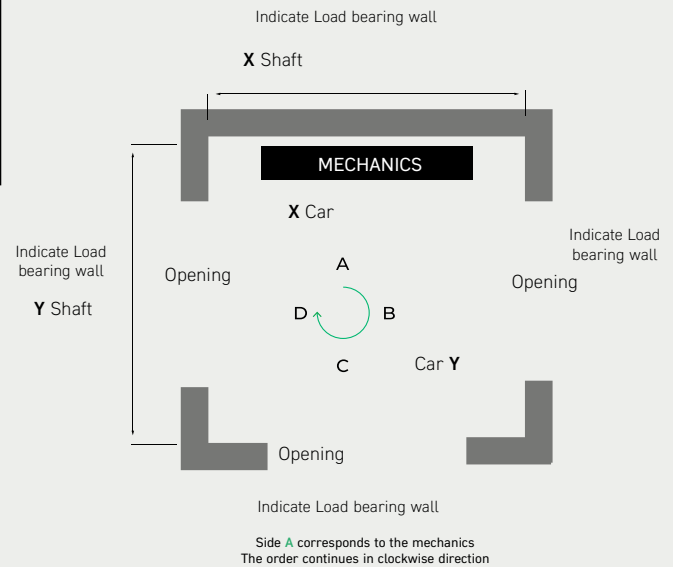

OTHER CAR ACCESSORIES \*

\* TFT display non available for Miniwatt

INDICATE LOAD BEARING WALL  
 (also the ones where the mechanics is not applied)<sup>1</sup>

<sup>1</sup> Mandatory for Zen

LANDING DOORS

FLOOR	SIDE	FINISHING	WINDOW	GLASS	LANDING ACCESSORIES	OUTDOOR	INDOOR

RAL painted mechanics

RAL painted car external walls

GENERAL NOTES

CABINET
---------

Landing door side<sup>1</sup>

Distant from shaft mt

at floor

on the wall H 2100

on the wall H 800

Cables entry from shaft

Position on side

<sup>1</sup>Not possible with doors: Glass & Metal, Total Glass, 3AT, Non-standard doors height and EI  
 Not possible if the structure is provided by the custom

## ARE STRUCTURE

### ENVIRONMENT

<sup>1</sup>With ARE Structure indicate external dimensions

### FINISHING

### RAL

### ROOF Supply

### ROOF TYPE

#### ROOF FOR OUTDOOR

Lower Side	Over hangs
Side A	Side A
Side B	Side B
Side C	Side C
Side D	Side D

#### Water Collecting Glass

- Corner AB
- Corner BC
- Corner CD
- Corner DA

### CLADDING

Side A

Side B

Side C

Side D

#### MIXED CLADDING

##### Side A

Cladding from the Top

Quote From the top

Cladding from the Bottom

From the bottom

##### Side B

Cladding from the Top

Quote From the top

Cladding from the Bottom

From the bottom

##### Side C

Cladding from the Top

Quote From the top

Cladding from the Bottom

From the bottom

##### Side D

Cladding from the Top

Quote From the top

Cladding from the Bottom

From the bottom

### ACCESSORIES

#### Top Ventilation

- Side A
- Side B
- Side C
- Side D

#### Bottom Ventilation

- Side A
- Side B
- Side C
- Side D

- Closing angles
- Roof casing
- Eaves pipe
- Pit cladding

#### Canopy 800mm

- Quantity
- Side
- Floor

### STRUCTURE BRACKETS

Upright AB      Upright BC      Upright CD      Upright DA

#### Structure brackets NOTES

### HEADROOM BRACKETS

Upright AB      Upright BC  
 Upright CD      Upright DA

#### Headroom brackets NOTES

**BOARDWALK**      Quantity      Floor      Length      Depth

**RAILINGS**      Quantity      Floor      Length      Depth

### General NOTES

## ACCESS SELECTION

<b>CABIN ACCESS SELECTION</b>	
KEY TYPE <sup>1</sup>	FUNCTION <sup>2</sup>
Key 1	
Key 2	
Key 3	
Key 4	

<b>LANDING ACCESS SELECTION</b>		
STOP <sup>4</sup>	KEY TYPE <sup>1</sup>	FUNCTION <sup>2</sup>

### MAIN FLOOR<sup>3</sup>

<b>GUEST MANEUVER ENABLING</b>
<b>NOTES</b>

### KEY TYPE

- 2 positions Key – 1 extraction (2P1E)
- 2 positions Key – 2 extractions (2P2E)
- I-button monostable
- I-button bistable
- I-button EVO monostable
- Alphanumeric keypad N° 1 exit

#### **2 positions Key – 1 extraction (2P1E)**

This key enables/disables the call buttons. Pulling out the key, the call button is disabled.

#### **2 positions Key – 2 extractions (2P2E)**

This type of key is used only to enable special functions (e.g. plant disabling). It is possible to extract the key both with open contact (function disabled) and with closed contact (function enabled).

#### **I-button monostable**

Vandal-proof electronic key; the contact is interrupted for 5 seconds after placing the key on the reader (when the contact is interrupted, the green LED lights up).

#### **I-button bistable**

Electronic equivalent of the 2P2E mechanical key. The contact is interrupted (green LED on) by placing the key on the reader once and is re-enabled (green LED off) by placing the key back on the reader.

#### **I-button Evo Monostable**

Vandal-proof electronic key with one or more serial expansion boards with 4 contacts.

1 Select one of the keys listed in the KEY TYPE selection.

2 Indicate the contact function. Here below some compilation examples:

In car – key 1: 2P1E – Enables button "1"  
 key 2: 2P2E – Enables button "2" + "3"

At landing floor – OA – I-button monostable – Enables button at floor "OA"

3 It indicates the call button that must remain free for regulatory reasons.

4 Indicate the landing and the side.